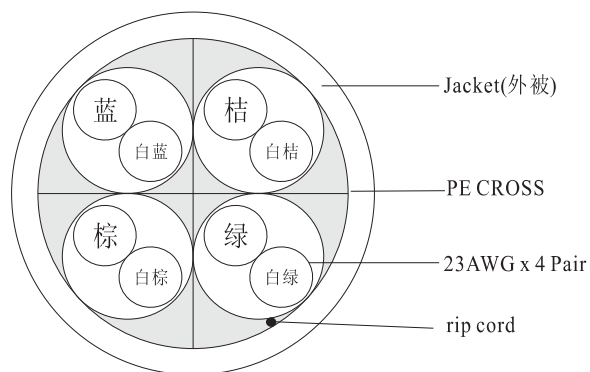


SLU6CB231


- Color cord
- 1.Blue-White/Blue
 - 2.Orange-White/Orange
 - 3.Green-White/Green
 - 4.Brown-White/Brown

ITEM		
No. of Cord. (芯線數)		4 Pair 對
Conductor 導體	Material (材質)	Bare Copper Solid (裸銅線)
	Construction (結構)	23AWG; 1/0.565 ± 0.008 mm
Insulation 絕緣	Material (材質)	Polyethylene
	Thickness (厚度)	0.22±0.02 mm
	Diameter (外徑)	1.02 ± 0.05 mm
Inner Layer 內絞合	Direction (絞向)	S(右向)
	Pitch (絞距) REF	30mm underneath
Outside Layer 外絞合	Direction (絞向)	S (右向)
	Pitch (絞距) REF	100±10mm
Cross 十字骨架	Material (材質)	Polyethylene
	Construction(結構)	4.0mm×4.0mm
Rip cord 撕裂線	Material (材質)	Nylon
	Material (材質)	PVC
Jacket 被覆	Thickness (厚度)	0.50 mm(Min. Thichness: 0.40mm)
	Diameter (外徑)	6.3 ± 0.20 mm
	Color (顏色)	Optional
Marking		Optional

ELECTRICAL PROPERTIES(電氣特性)	
ITEM	
Insulation Resistance (絕緣電阻)	Min. 5000 mega ohms-km at 20°C
Dielectric Test (耐電壓)	1000V DC /1 min ; No Breakdown
Temperature Rating (額定溫度)	75°C
Voltage Rating (額定電壓)	30V

DRWN.	ChenFeng	SPEC NO:	Construction: 23AWG x 4P
CHKD.	Gao	SLU6CB231	Customer:
APPD.	Gao	DATE:6-16-2007	
SUR-LINK TECHNOLOGY CO.,LTD.			

