

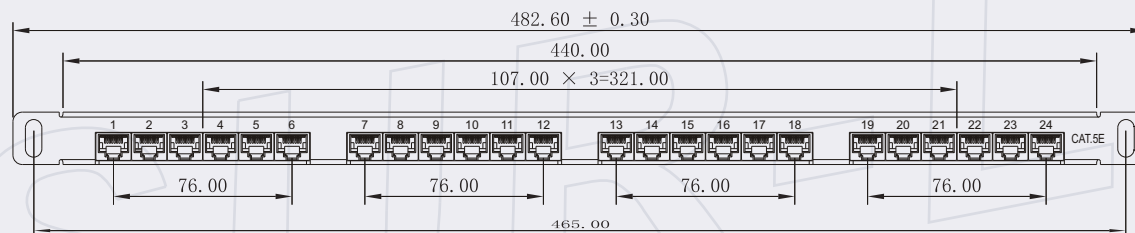


Cat.5e 0.5U UTP Patch Panel, 24 Ports

www.sur-link.com

SPP-U662L1

Cat.5e 0.5U UTP Patch Panel, 24 Ports

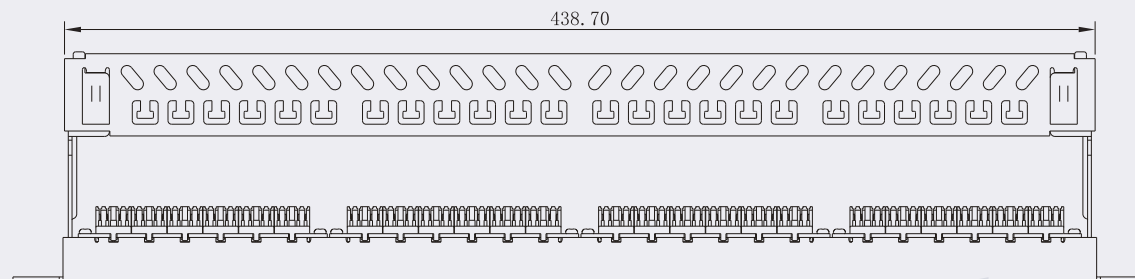

NOTES:

- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS
 - CURRENT RATING : 1.5 AMP
 - CONTACT RESISTANCE : 20 MILLIOHMS MAX
 - INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 V DC
 - DIELECTRIC STRENGTH : 750 V AC RMS 60Hz, 1MIN
 - C5e PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1
- MECHANICAL:**
- HOUSING MATERIAL : PBT+30%GF
 - PANEL FRAME : ST-12,T=1.6,POWDER COATING IN BLACK COLOR
 - IDC MATERIAL : PC, CONTACT: PHOSPHOR BRONZE,TIN PLATED
 - RJ45 JACK LIFE : 750 CYCLES MIN
 - IDC LIFE : 200 TIMES MIN
 - WIRE : AWG 22~24
 - TIA CAT5E PERM.LINK TEST: WORST PAIR NEXT MARGIN ≥ 3.0dB
 - RETENTIVENESS OF INSERTION STRUCTURE: 50N 60 ± 5S
- ENVIRONMENTAL:**
- STORAGE : -40 ° TO +70 °
 - OPERATION : -10 ° TO +60 °
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F