






Cat.6A 0.5U UTP Patch Panel, 24 Ports

www.sur-link.com

SPP-UC62L1

Cat.6A 0.5U UTP Patch Panel, 24 Ports

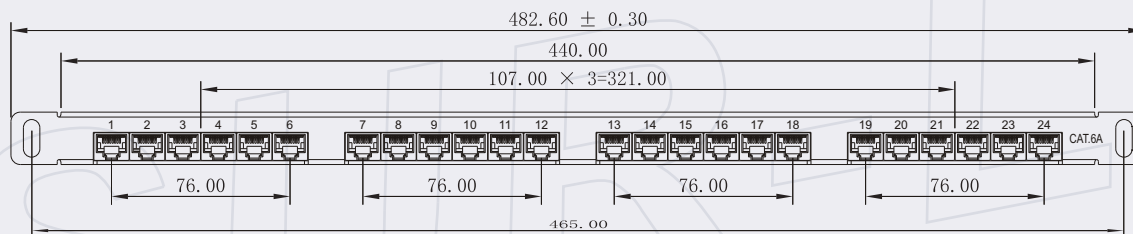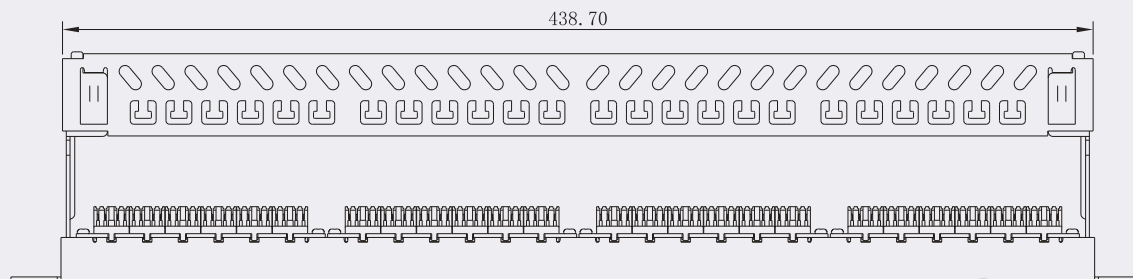

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 V DC
5. DIELECTRIC STRENGTH : 750 V AC RMS 60Hz, 1MIN
6. C6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%GF
2. PANEL FRAME : ST-12, T=1.6, POWDER COATING IN BLACK COLOR
3. IDC MATERIAL : PC, CONTACT: PHOSPHOR BRONZE, TIN PLATED
4. RJ45 JACK LIFE : 750 CYCLES MIN
5. IDC LIFE : 200 TIMES MIN
6. WIRE : AWG 22~24
7. TIA CAT6A PERM.LINK TEST: WORST PAIR NEXT MARGIN \geq 3.0dB
8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60 \pm 5S

ENVIRONMENTAL:

1. STORAGE : -40 ° TO +70 °
 2. OPERATION : -10 ° TO +60 °
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F

