

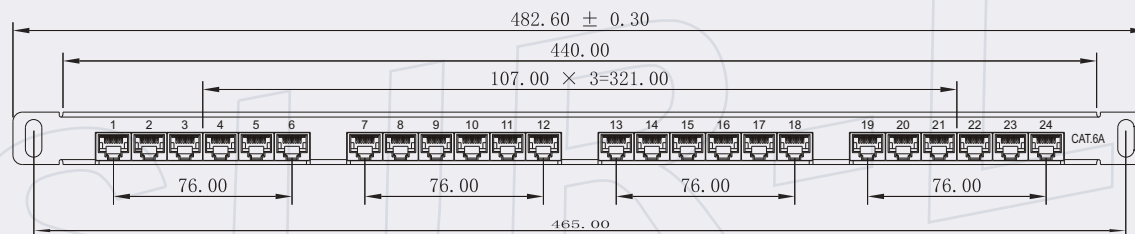


# Cat.6A 0.5U UTP Patch Panel, 24 Ports

SPP-UC62L1

Cat.6A 0.5U UTP Patch Panel, 24 Ports

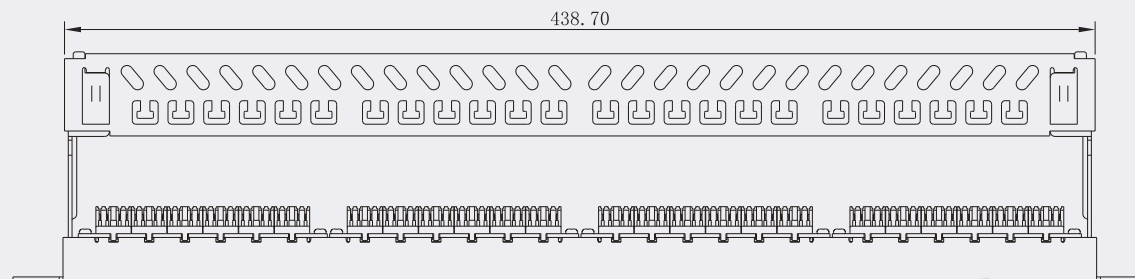

**NOTES:**

**ELECTRICAL:**

- 1. VOLTAGE RATING : 125 VAC RMS
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
- 4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 V DC
- 5. DIELECTRIC STRENGTH : 750 V AC RMS 60Hz, 1MIN
- 6. C6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

**MECHANICAL:**

- 1. HOUSING MATERIAL : PBT+30%GF
- 2. PANEL FRAME : ST-12, T=1.6, POWDER COATING IN BLACK COLOR
- 3. IDC MATERIAL : PC, CONTACT: PHOSPHOR BRONZE, TIN PLATED
- 4. RJ45 JACK LIFE : 750 CYCLES MIN
- 5. IDC LIFE : 200 TIMES MIN
- 6. WIRE : AWG 22~24
- 7. TIA CAT6A PERM.LINK TEST: WORST PAIR NEXT MARGIN ≥ 3.0dB
- 8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60 ± 5S

**ENVIRONMENTAL:**

- 1. STORAGE : -40 ° TO +70 °
  - 2. OPERATION : -10 ° TO +60 °
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F