
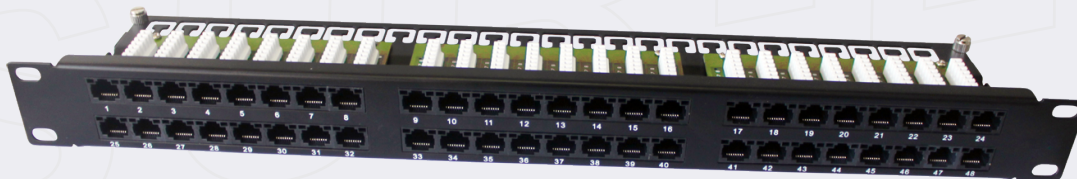


Cat.5e 1U UTP Patch Panel, 48 Ports

SPP-G592L1

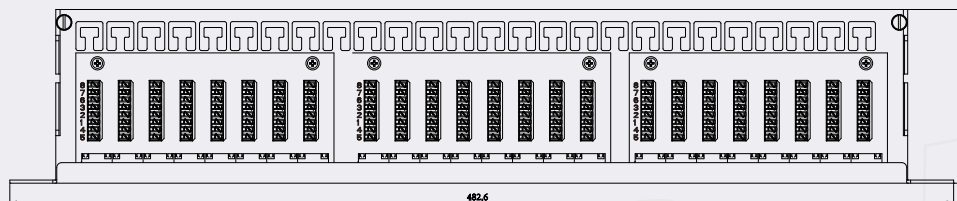

NOTES:

ELECTRICAL:

- | | |
|--------------------------|-------------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 20 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 100 MEGOHMS MIN @ 500 V DC. |
| 5. DIELECTRIC STRENGTH | : 750 V AC RMS 60Hz, 1MIN. |
| 6. C5e PERMANENT LINK | : CONFORM TO ANSI/TIA/EIA-568 B.2-1 |

MECHANICAL:

- | | |
|-----------------------------------------|---------------------------------------------|
| 1. HOUSING MATERIAL | : PBT+30%GF |
| 2. PANEL FRAME | : ST-12,T=1.6,POWDER COATING IN BLACK COLOR |
| 3. IDC MATERIAL | : PC, CONTACT: PHOSPHOR BRONZE,TIN PLATED |
| 4. RJ45 JACK LIFE | : 750 CYCLES MIN |
| 5. IDC LIFE | : 200 TIMES MIN |
| 6. WIRE | : AWG 22-24 |
| 7. TIA CAT6 PERM.LINK TEST | : WORST PAIR NEXT MARGIN ≥3.0dB |
| 8. RETENTIVENESS OF INSERTION STRUCTURE | : 50N 60±5S |

ENVIRONMENTAL:

- | | |
|--------------|-------------------|
| 1. STORAGE | : -40°C TO +70°C. |
| 2. OPERATION | : -10°C TO +60°C. |

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F